



INFORMACIÓN DEL PRODUCTO

Modelo: K56AC52F07
0.75 HP, 1 Ph, 60 Hz, 110/220V, 1800 RPM,
Frame K56, ODP







Detalles de la Placa de Identificación

Fase	1	Potencia de Salida (HP)	0.75 HP
Potencia de Salida (kW)	0.5 kW	Voltaje	110/220V
Velocidad	1800 RPM	Factor de Servicio	1,25
Frame	K56	Tipo de Carcasa	Semiabierta (ODP)
Protección Térmica	No	Temperatura Ambiente	40° C
Frecuencia	60 Hz	Corriente full carga @110V	8.46 AMPS
Régimen de trabajo	Continuo	Clase de Aislamiento	Clase B
Certificación UL	Sí	Certificación CSA	Sí
Certificación CE	Sí		

Especificaciones Técnicas

Tipo	Eléctrico	Método de arranque	Eléctrico
Polos	4	Dirección de rotación	Ambos sentidos
Montaje	Base resiliente	Tipo de eje	Eje cuña

Información del producto: Modelo:K56AC52F07, 0.75 HP, 1 Ph, 60 Hz, 110/220V, 1800 RPM, Frame K56, ODP

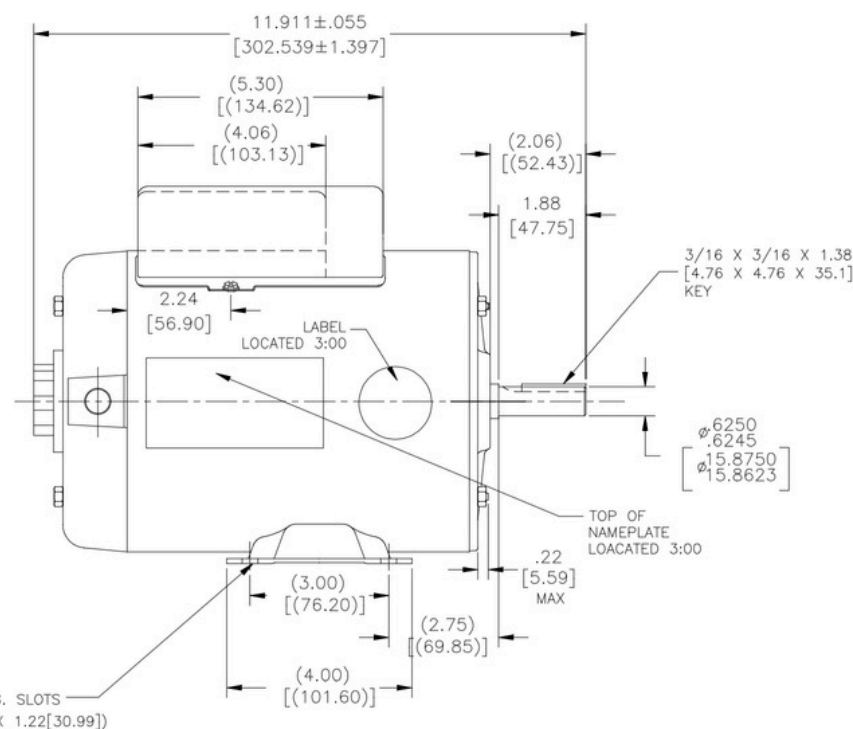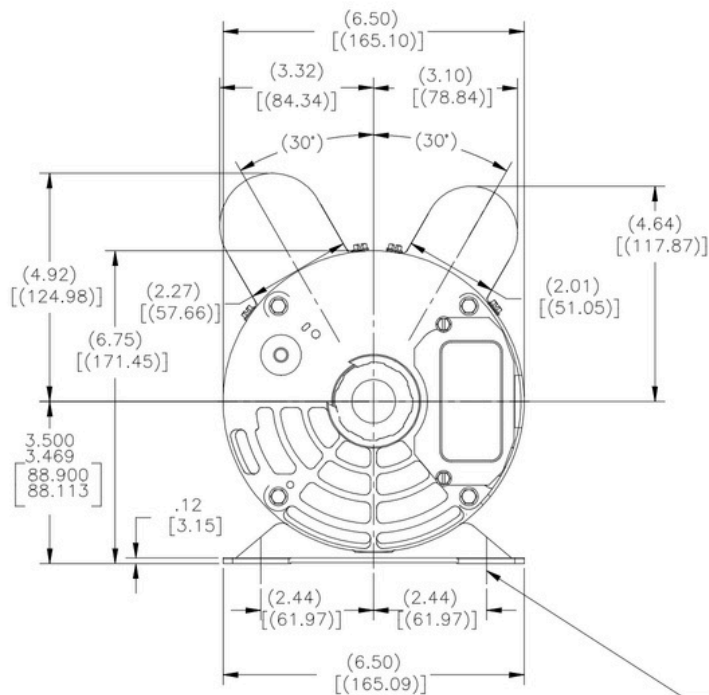


4 MTG. SLOTS
(.34[8.64] X 1.22[30.99])

NAMEPLATE DATA

MODEL: K56AC52F07
CUST PN: -
HP: 3/4 SF: 1.25
ROT: REV
RPM: 1725
TYPE: CP CODE: --
FORM: KHH FRAME: K56
VOLTS: 110-127/208-230
AMPS: 8.46-8.60/4.19-4.25
MAX AMPS: --
SF AMPS: 9.96-10.72/4.84-5.12
PH: 1 HZ: 60
INS: 1 AMB: 40°C
DUTY: CONT
ENCLOSURE: IP21
NO THERMALLY PROTECTED

EXTERNAL CONNECTION DIAGRAM

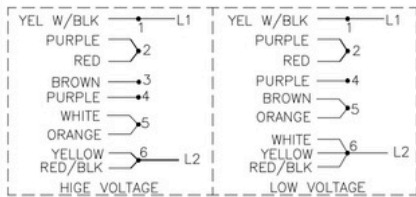

CONNECTION SHOWS ARE FOR C.W. FROM LEAD END. FOR CCW LEAD ROTATION, INTERCHANGE YELLOW AND RED LEADS.

NOTES

- SHAFT RUNOUT NOT TO EXCEED .002[.05] T.I.R
- THE LEAD ASSY SHOULD TO COME CONNECTED AT 110V. IF THE CUSTOMER NEEDS TO SWITCH TO 220V, HE/SHE WILL OPEN THE COVER AND SWITCH IT MANUALLY, FOLLOWING THE ELECTRICAL DIAGRAM.

PERFORMANCE CURVE

APPROVED SAMPLE

OER-008038

UL COMPONENT

CSA

FILE# CCN# FILE# GUIDE#

FILE# GUIDE#

CUSTOMER

RBM

DRAWING REVISION	REVISION BY	DATE	TOLERANCES UNLESS OTHERWISE SPECIFIED
H	MIN/JING JIANG	09-26-2017	DEC. INCH mm
ECO	QINGFENG HE	09-26-2017	.XX ±0.02 [±0.51]
ECO-0131232	QINGFENG HE	09-26-2017	.XXX ±0.005 [±0.127]
ECO DESCRIPTION			.XXXX ±0.0005 [±0.0127]
UPDATE EXTERNAL CONNECTION DIAGRAM			REMOVE BURRS & BREAK SHARP EDGES .003/.015 [0.076/.381]
COPYRIGHT REGAL BELLOIT AMERICA, INC. ALL RIGHTS RESERVED.			CORNER FILETS .02 [1.51]
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELLOIT AMERICA, INC. ("REGAL") AND CONTAINS REGAL'S PROPRIETARY INFORMATION, ANY DISCLOSURE, REPRODUCTION OR OTHER USE OF THIS DOCUMENT WITHOUT THE EXPRESS WRITTEN PERMISSION OF REGAL IS STRICTLY PROHIBITED. REGAL SHALL BE RETURNED TO REGAL UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.			MACHINED SURFACES .003/.015 [0.076/.381]
			mm SHOWN IN [BRACKETS]

DRAWN BY:	DATE:	APPROVED BY:	DATE:
XAN	09-10-2015	TZHAO	09-10-2015
REFERENCE	THIRD ANGLE PROJECTION	SIZE DWG NO	SHEET
		C	1

REGAL™	Regal Beloit America, Inc.
DESCRIPTION	MODEL-PFHP-56FR OUTLINE
MATERIAL	3/16 X 3/16 X 1.38 KEY
PROCESS/FINISH	TOP OF NAMEPLATE LOCATED 3:00
SIZE DWG NO	K56AC52F07CX
SHEET	1